

Supacell®
digital
electronics

LED
LIGHTING




2015 - 2016 PRODUCT CATALOGUE



“Over 25 years of
experience in the lamp
& lighting industry”


Imran Hussain
(Managing Director)

CONTENTS




06 - 11

**Candle C37, Golf G45,
GLS A60**

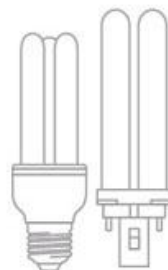


32 - 35

**U Lamps & PLC Lamps
(Replacements for CFL)**



12 - 17

Spot, AR111 Bulbs

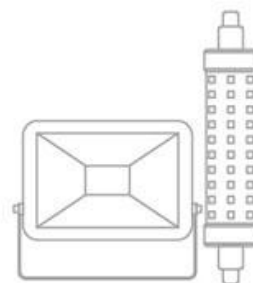

36 - 43

**R7 Linear Bulbs, Slim Flood
& Commercial Flood Lights**



18 - 27

Reflector & PAR Bulbs




44 - 47

**Professional Series & Basic
/Economy LED Series**



28 - 31

Light Strips & Tubes



48 - 52

**Supacell Digital Batteries
POS Materials & Appliance Bulbs**



Smart and simplified packaging, designed to provide clear identity, specification and technical detail per product. With attractive and incredible stand out shelf-appeal, our range is specifically aimed towards an enhanced and informed buying experience. Supacell® LED lighting products are manufactured to the highest standards, using superior advanced components. Meeting the latest EU & US environmental energy and safety regulations, Supacell® LED offer huge energy savings and a longer life for the best possible lighting experience.

* Certain special sizes may vary due to unique nature of bulb, lumens are clearly stated within brochure

Smart & creative packaging design with clear labelling to better identify the product specifications & technical details, making purchase decisions simpler, easier & favourable.

Distinct WHITE PACKAGING for all Dimmable LED



Attractive DARK BLUE PACKAGING for all A+ Smart LED



Clear & Simple LED technical specifications



Why choose Supacell[®] LED lighting ?



Up to 30k+ hours life*



Manufactured to ErP guidelines & standards



Up to 90% saving in energy costs*



No UV & thermal radiation



3 year Guarantee*



Aluminium body with thermal plastic coating for better heat resistance & more attractive look



A+ Energy Rated ACD driver for longer life & superior heat resistance*



Instant light—no warm up time



Highest quality A+ Smart LED chip for brighter, better quality light



Free from harmful elements

* See web site for details

OUR PROMISE

To provide the highest quality LED light bulbs designed with the latest up-to-date technology and offering the best lumens per watt by using the highest possible quality components. With strict quality control, we will offer a wide product range to satisfy market needs – supported by a good guarantee and competitive pricing. This is all made possible through streamlining, system automation, strict management of the factory floor & close attention to total quality control.



STREAMLINING

Through production, order, delivery and after-sales service. Our comprehensive systems and complete integration process in all departments enables us to deliver to our customers the highest quality products with the best possible service and delivery times.

SYSTEM AUTOMATION

We operate a fully automated production and management system. This ensures strict quality control and provides a highly efficient production environment, increasing stability and capacity. In return we are able to produce top quality products at very competitive prices.



TOTAL QUALITY CONTROL

Our strict quality control starts with the rigorous screening of components, comprehensive verification of product build quality and continuous research and development in up-to-date technology know how!



FACTORY FLOOR

Through bespoke factory control systems which greatly contribute to our production quality control and management records, both upstream and downstream, we are able to strengthen our process planning and improve quality control. Such systems enable us to proudly offer the highest quality LED lamps with the best lumens per watt, a 3 year guarantee and up-to 30,000 hours life per bulb.



CANDLE C37

SERIES



					
warm white	200° 270°	6w	425lms	40w	Dim



					
warm white	200° 270°	3w 5w	250lms 425lms	25w 40w	No Dim



A+ SMART LED™

ACD™
DRIVER
for longer life &
superior heat
resistance.

3w

SPECIFICATION	BASE	COVER COLOUR	CODE
POWER: 3w = 25w = 250lms	SES (E14)	OPAL / PEARL	SLC P SES 3
VOLTS / Hz: 100 - 250V / 50-60Hz		CLEAR	SLC C SES 3
BEAM ANGLE: 200° PEARL	ES (E27)	OPAL / PEARL	SLC P ES 3
270° CLEAR		CLEAR	SLC C ES 3
COLOUR : Warm White	SBC (B15)	OPAL / PEARL	SLC P SBC 3
CCT: 2700K		CLEAR	SLC C SBC 3
	BC (B22)	OPAL / PEARL	SLC P BC 3
		CLEAR	SLC C BC 3

NON DIMMABLE

5w

SPECIFICATION	BASE	COVER COLOUR	CODE
POWER: 5w = 40w = 425lms	SES (E14)	OPAL / PEARL	SLC P SES 5
VOLTS / Hz: 100 - 250V / 50-60Hz		CLEAR	SLC C SES 5
BEAM ANGLE: 200° PEARL	ES (E27)	OPAL / PEARL	SLC P ES 5
270° CLEAR		CLEAR	SLC C ES 5
COLOUR : Warm White	SBC (B15)	OPAL / PEARL	SLC P SBC 5
CCT: 2700K		CLEAR	SLC C SBC 5
	BC (B22)	OPAL / PEARL	SLC P BC 5
		CLEAR	SLC C BC 5

NON DIMMABLE



C37 OPAL / PEARL



C37 CRYSTAL CLEAR

6w

SPECIFICATION	BASE	COVER COLOUR	CODE
POWER: 6w = 40w = 425lms	SES (E14)	OPAL / PEARL	SLC P SES D6
VOLTS / Hz: 220 - 240V / 50-60Hz		CLEAR	SLC C SES D6
BEAM ANGLE: 200° PEARL	ES (E27)	OPAL / PEARL	SLC P ES D6
270° CLEAR		CLEAR	SLC C ES D6
COLOUR : Warm White	SBC (B15)	OPAL / PEARL	SLC P SBC D6
CCT: 2700K		CLEAR	SLC C SBC D6
	BC (B22)	OPAL / PEARL	SLC P BC D6
		CLEAR	SLC C BC D6

DIMMABLE

→ Now also available in

COLOUR	CCT
Day White	4000K
Cool White	6500K

*size varies depending on cap base & clear or pearl type

GOLF G45 SERIES



					
warm white	200° 270°	6w	425lms	40w	Dim



					
warm white	200° 270°	3w 5w	250lms 425lms	25w 40w	No Dim

A+ SMART LED™

ACD™
DRIVER
for longer life &
superior heat
resistance.

3w	SPECIFICATION	BASE	COVER COLOUR	CODE	NON DIMMABLE
POWER:	3w = 25w = 250lms	SES (E14)	OPAL / PEARL	SLG P SES 3	
VOLTS / Hz:	100 - 250V / 50-60Hz	ES (E27)	CLEAR	SLG C SES 3	
BEAM ANGLE:	200° PEARL	ES (E27)	OPAL / PEARL	SLG P ES 3	
	270° CLEAR	SBC (B15)	CLEAR	SLG C ES 3	
COLOUR :	Warm White	SBC (B15)	OPAL / PEARL	SLG P SBC 3	
CCT:	2700K	BC (B22)	CLEAR	SLG C SBC 3	
		BC (B22)	OPAL / PEARL	SLG P BC 3	
		BC (B22)	CLEAR	SLG C BC 3	

5w	SPECIFICATION	BASE	COVER COLOUR	CODE	NON DIMMABLE
POWER:	5w = 40w = 425lms	SES (E14)	OPAL / PEARL	SLG P SES 5	
VOLTS / Hz:	100 - 250V / 50-60Hz	ES (E27)	CLEAR	SLG C SES 5	
BEAM ANGLE:	200° PEARL	ES (E27)	OPAL / PEARL	SLG P ES 5	
	270° CLEAR	SBC (B15)	CLEAR	SLG C ES 5	
COLOUR :	Warm White	SBC (B15)	OPAL / PEARL	SLG P SBC 5	
CCT:	2700K	BC (B22)	CLEAR	SLG C SBC 5	
		BC (B22)	OPAL / PEARL	SLG P BC 5	
		BC (B22)	CLEAR	SLG C BC 5	



6w	SPECIFICATION	BASE	COVER COLOUR	CODE	DIMMABLE
POWER:	6w = 40w = 425lms	SES (E14)	OPAL / PEARL	SLG P SES D6	
VOLTS / Hz:	220 - 240V / 50-60Hz	ES (E27)	CLEAR	SLG C SES D6	
BEAM ANGLE:	200° PEARL	ES (E27)	OPAL / PEARL	SLG P ES D6	
	270° CLEAR	SBC (B15)	CLEAR	SLG C ES D6	
COLOUR :	Warm White	SBC (B15)	OPAL / PEARL	SLG P SBC D6	
CCT:	3000K	BC (B22)	CLEAR	SLG C SBC D6	
		BC (B22)	OPAL / PEARL	SLG P BC D6	
		BC (B22)	CLEAR	SLG C BC D6	

→ Now also available in

COLOUR	CCT
Day White	4000K
Cool White	6500K



*size varies depending on cap base & clear or pearl type

GLS A60 SERIES

SUPER EFFICIENT
90
LUMEN
PER WATT



					
warm white	270°	6.5w 9w	630lms 810lms	50w 60w	Dim



					
warm white	270°	5w 9w 12w	450lms 850lms 1050lms	40w 60w 75w	No Dim



A+ SMART LED™

ACD™
DRIVER
for longer life &
superior heat
resistance.

5w	SPECIFICATION	BASE	COVER COLOUR	CODE
	POWER: 5w = 40w = 450lms	ES (E27)	OPAL / PEARL	SLA P ES 5
	VOLTS / Hz: 100 - 250V / 50-60Hz		CLEAR	SLA C ES 5
	BEAM ANGLE: 270°	BC (B22)	OPAL / PEARL	SLA P BC 5
	COLOUR: Warm White		CLEAR	SLA C BC 5
	CCT: 2700K		NON DIMMABLE	

9w	SPECIFICATION	BASE	COVER COLOUR	CODE
	POWER: 9w = 60w = 850lms	ES (E27)	OPAL / PEARL	SLA P ES 9
	VOLTS / Hz: 100 - 250V / 50-60Hz		CLEAR	SLA C ES 9
	BEAM ANGLE: 270°	BC (B22)	OPAL / PEARL	SLA P BC 9
	COLOUR: Warm White		CLEAR	SLA C BC 9
	CCT: 2700K		NON DIMMABLE	

12w	SPECIFICATION	BASE	COVER COLOUR	CODE
	POWER: 12w = 75w = 1050lms	ES (E27)	OPAL / PEARL	SLA P ES 12
	VOLTS / Hz: 100 - 250V / 50-60Hz		CLEAR	SLA C ES 12
	BEAM ANGLE: 270°	BC (B22)	OPAL / PEARL	SLA P BC 12
	COLOUR: Warm White		CLEAR	SLA C BC 12
	CCT: 2700K		NON DIMMABLE	

6.5w	SPECIFICATION	BASE	COVER COLOUR	CODE
	POWER: 6.5w = 50w = 630lms	ES (E27)	OPAL / PEARL	SLA P ES D6.5
	VOLTS / Hz: 220 - 240V / 50-60Hz		CLEAR	SLA C ES D6.5
	BEAM ANGLE: 270°	BC (B22)	OPAL / PEARL	SLA P BC D6.5
	COLOUR: Warm White		CLEAR	SLA C BC D6.5
	CCT: 2700K		DIMMABLE	

9w	SPECIFICATION	BASE	COVER COLOUR	CODE
	POWER: 9w = 60w = 810lms	ES (E27)	OPAL / PEARL	SLA P ES D9
	VOLTS / Hz: 220 - 240V / 50-60Hz		CLEAR	SLA C ES D9
	BEAM ANGLE: 270°	BC (B22)	OPAL / PEARL	SLA P BC D9
	COLOUR: Warm White		CLEAR	SLA C BC D9
	CCT: 2700K		DIMMABLE	

→ Now also available in

COLOUR	CCT
Day White	4000K
Cool White	6500K


5w OPAL / PEARL non dim type 60mm x 112mm 90 lumens per watt



GLS A60 SERIES

SPOT SERIES

G4,G9,GU4/MR11

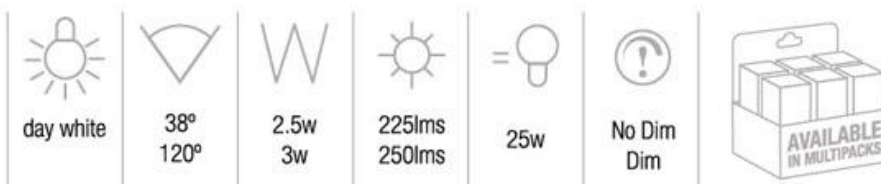

A+ SMART LED™

ACD™
DRIVER
for longer life &
superior heat
resistance.

G4, G9, MR11 SPOT SERIES



2.5w

SPECIFICATION		BASE	COLOUR	CCT	CODE
POWER:	2.5w = 25w = 225lms	 G4	Day White	4000K	SLG4-2.5-1
VOLTS / Hz:	12V / 50-60Hz				SLG4-2.5-2
BEAM ANGLE:	120°				SLG4-2.5-3
NON DIMMABLE					



3w

SPECIFICATION		BASE	COLOUR	CCT	CODE
POWER:	3w = 25w = 250lms	 G9	Day White	4000K	SLG9-3-1
VOLTS / Hz:	220 - 240V / 50-60Hz				SLG9-3-2
BEAM ANGLE:	120° 				SLG9-3-3
NON DIMMABLE					

3w

SPECIFICATION		BASE	COLOUR	CCT	CODE
POWER:	3w = 25w = 250lms	 GU4 MR11	Day White	4000K	SLM R11-3
VOLTS / Hz:	12V / 50-60Hz				
BEAM ANGLE:	38°				
		NON DIMMABLE			

3w

SPECIFICATION		BASE	COLOUR	CCT	CODE
POWER:	3w = 25w = 250lms	 GU4 MR11	Day White	4000K	SLM R11D-3
VOLTS / Hz:	12V / 50-60Hz				
BEAM ANGLE:	38°				
		DIMMABLE			



SPOT SERIES

GU10 (PAR16), MR16

					
warm white cool white	38°	5.5w	425lms	50w	Dim



						
warm white cool white	38° 120°	3.5w 5w	250lms 425lms	35w 50w	No Dim	AVAILABLE IN MULTIPACKS

A+ SMART LED™

ACD™
DRIVER
for longer life &
superior heat
resistance.



GU10 / PAR16



MR16

3.5w	SPECIFICATION	BASE	COLOUR	CCT	CODE
	POWER: 3.5w = 35w = 250lms	GU 10	Warm White	2700K	SLGU10-3.5W
	VOLTS / Hz: 100 - 250V / 50-60Hz	MR 16	Cool White	6500K	SLGU10-3.5C
	12V / 50-60Hz		Warm White	2700K	SLMR16-3.5W
	BEAM ANGLE: 38°		Cool White	6500K	SLMR16-3.5C
		NON DIMMABLE			

5w	SPECIFICATION	BASE	COLOUR	CCT	CODE
	POWER: 5w = 50w = 425lms	GU 10	Warm White	2700K	GLGU10-5W
	VOLTS / Hz: 100 - 250V / 50-60Hz	MR 16	Cool White	6500K	GLGU10-5C
	12V / 50-60Hz		Warm White	2700K	SLMR16-5W
	BEAM ANGLE: 38°		Cool White	6500K	SLMR16-5C
		NON DIMMABLE			

5.5w	SPECIFICATION	BASE	COLOUR	CCT	CODE
	POWER: 5.5w = 50w = 425lms	GU 10	Warm White	2700K	SLGU10D-5.5W
	VOLTS / Hz: 220 - 240V / 50-60Hz	MR 16	Cool White	6500K	SLGU10D-5.5C
	12V / 50-60Hz		Warm White	2700K	SLMR16D-5.5W
	BEAM ANGLE: 38°		Cool White	6500K	SLMR16D-5.5C
		DIMMABLE			

3.5w	SPECIFICATION	BASE	COLOUR	CCT	CODE
	POWER: 3.5w = 35w = 250lms	GU 10	Warm White	2700K	SLGU10-3.5WB
	VOLTS / Hz: 100 - 250V / 50-60Hz	MR 16	Cool White	6500K	SLGU10-3.5CB
	12V / 50-60Hz		Warm White	2700K	SLMR16-3.5WB
	WIDE ANGLE BEAM: 120°		Cool White	6500K	SLMR16-3.5CB
		NON DIMMABLE			

5w	SPECIFICATION	BASE	COLOUR	CCT	CODE
	POWER: 5w = 50w = 425lms	GU 10	Warm White	2700K	SLGU10-5WB
	VOLTS / Hz: 100 - 250V / 50-60Hz	MR 16	Cool White	6500K	SLGU10-5CB
	12V / 50-60Hz		Warm White	2700K	SLMR16-5WB
	WIDE ANGLE BEAM: 120°		Cool White	6500K	SLMR16-5CB
		NON DIMMABLE			



GU10 PAR16
WIDE ANGLE

AR111 SPOT SERIES



					
warm white cool white	24° 38°	12w	800lms	75w 80w	No Dim

A+ SMART LED™

ACD™
DRIVER
for longer life &
superior heat
resistance.



12w

SPECIFICATION	BASE	COLOUR	CCT	CODE
POWER: 12w = 75w = 800lms	G53	Warm White	2700K	SL AR111 12W
VOLTS / Hz: 12V / 50-60Hz	G53	Cool White	6500K	SL AR111 12C
BEAM ANGLE: 38°	GU10	Warm White	2700K	SL AR111 GU 12W
	GU10	Cool White	6500K	SL AR111 GU 12C
NON DIMMABLE				



AR111+

12w

SPECIFICATION	BASE	COLOUR	CCT	CODE
POWER: 12w = 80w = 800lms	G53	Warm White	2700K	SL AR111 P 12W
VOLTS / Hz: 12V / 50-60Hz	G53	Cool White	6500K	SL AR111 P 12C
BEAM ANGLE: 24°	GU10	Warm White	2700K	SL AR111 PGU 12W
	GU10	Cool White	6500K	SL AR111 PGU 12C
NON DIMMABLE				

AR111, AR111+ SPOT SERIES

REFLECTOR

A+ SMART LED SERIES



					
warm white cool white	120°	3w 5w 8w 12w	270lms 425lms 650lms 1000lms	25w 40w 50w 75w	No Dim

A+ SMART LED™

ACD™
DRIVER
for longer life &
superior heat
resistance.

R39	SPECIFICATION	BASE	COVER COLOUR	COLOUR	CCT	CODE
3w	POWER: 3w = 25w = 270lms VOLTS / Hz: 100 - 250V / 50-60Hz BEAM ANGLE: 120°	SES (E14)	OPAL / PEARL	Warm White Cool White	2700K 6500K	SLR 3P SES3W SLR 3P SES3C
NON DIMMABLE						



R50	SPECIFICATION	BASE	COVER COLOUR	COLOUR	CCT	CODE
5w	POWER: 5w = 40w = 425lms VOLTS / Hz: 100 - 250V / 50-60Hz BEAM ANGLE: 120°	SES (E14)	OPAL / PEARL	Warm White Cool White	2700K 6500K	SLR 5P SES5W SLR 5P SES5C
NON DIMMABLE						

R63	SPECIFICATION	BASE	COVER COLOUR	COLOUR	CCT	CODE
8w	POWER: 8w = 50w = 650lms VOLTS / Hz: 100 - 250V / 50-60Hz BEAM ANGLE: 120°	ES (E27)	OPAL / PEARL	Warm White Cool White	2700K 6500K	SLR 6P ES8W SLR 6P ES8C
NON DIMMABLE						



R80	SPECIFICATION	BASE	COVER COLOUR	COLOUR	CCT	CODE
12w	POWER: 12w = 75w = 1000lms VOLTS / Hz: 100 - 250V / 50-60Hz BEAM ANGLE: 120°	ES (E27)	OPAL / PEARL	Warm White Cool White	2700K 6500K	SLR 8PES 12W SLR 8PES 12C
NON DIMMABLE						

REFLECTOR SERIES

REFLECTOR

DIMMABLE SERIES



warm white cool white	120°	4w 5w 8w 12w	325lms 425lms 650lms 1000lms	30w 40w 50w 75w	Dim

A+ SMART LED™

ACD™
DRIVER
for longer life &
superior heat
resistance.

R39	SPECIFICATION	BASE	COVER COLOUR	COLOUR	CCT	CODE
4w	POWER: 4w = 30w = 325lms VOLTS / Hz: 220 - 240V / 50-60Hz BEAM ANGLE: 120°	SES (E14)	OPAL / PEARL	Warm White Cool White	2700K 6500K	SLR 3P SES D4W SLR 3P SES D4C
				DIMMABLE		



R50	SPECIFICATION	BASE	COVER COLOUR	COLOUR	CCT	CODE
5w	POWER: 5w = 40w = 425lms VOLTS / Hz: 220 - 240V / 50-60Hz BEAM ANGLE: 120°	SES (E14)	OPAL / PEARL	Warm White Cool White	2700K 6500K	SLR 5PSES D5W SLR 5PSES D5C
				DIMMABLE		

R63	SPECIFICATION	BASE	COVER COLOUR	COLOUR	CCT	CODE
8w	POWER: 8w = 50w = 650lms VOLTS / Hz: 220 - 240V / 50-60Hz BEAM ANGLE: 120°	ES (E27)	OPAL / PEARL	Warm White Cool White	2700K 6500K	SLR 6PES D8W SLR 6PES D8C
				DIMMABLE		



R80	SPECIFICATION	BASE	COVER COLOUR	COLOUR	CCT	CODE
12w	POWER: 12w = 75w = 1000lms VOLTS / Hz: 220 - 240V / 50-60Hz BEAM ANGLE: 120°	ES (E27)	OPAL / PEARL	Warm White Cool White	2700K 6500K	SLR 8PES D12W SLR 8PES D12C
				DIMMABLE		

PAR

A+ SMART SERIES



warm white cool white	38°	5w 7w 13w 15w	425lms 650lms 1150lms 1250lms	50w 60w 100w 120w	No Dim


A+ SMART LED™

ACD™
DRIVER
for longer life &
superior heat
resistance.



PAR16

PAR16	SPECIFICATION	BASE	COVER COLOUR	COLOUR	CCT	CODE
5w	POWER: 5w = 50w = 425lms	SES (E14)	CLASSIC LENS	Warm White	2700K	SLP 16 SES 5W
	VOLTS / Hz: 100 - 250V / 50-60Hz			Cool White	6500K	SLP 16 SES 5C
	BEAM ANGLE: 38°			NON DIMMABLE		

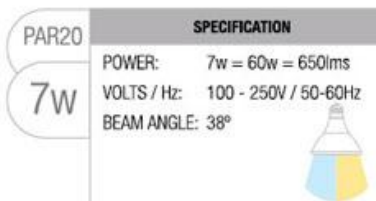


PAR20

PAR20	SPECIFICATION	BASE	COVER COLOUR	COLOUR	CCT	CODE
7w	POWER: 7w = 60w = 650lms	ES (E27)	CLASSIC LENS	Warm White	2700K	SLP 20 ES 7W
	VOLTS / Hz: 100 - 250V / 50-60Hz			Cool White	6500K	SLP 20 ES 7C
	BEAM ANGLE: 38°			NON DIMMABLE		



PAR30

PAR30	SPECIFICATION	BASE	COVER COLOUR	COLOUR	CCT	CODE
13w	POWER: 13w = 100w = 1150lms	ES (E27)	CLASSIC LENS	Warm White	2700K	SLP 30 ES 13W
	VOLTS / Hz: 100 - 250V / 50-60Hz			Cool White	6500K	SLP 30 ES 13C
	BEAM ANGLE: 38°			NON DIMMABLE		

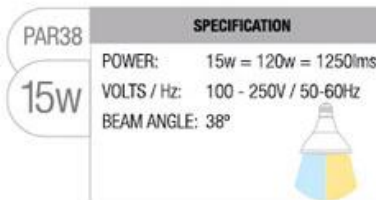

PAR38

PAR38	SPECIFICATION	BASE	COVER COLOUR	COLOUR	CCT	CODE
15w	POWER: 15w = 120w = 1250lms	ES (E27)	CLASSIC LENS	Warm White	2700K	SLP 38 ES 15W
	VOLTS / Hz: 100 - 250V / 50-60Hz			Cool White	6500K	SLP 38 ES 15C
	BEAM ANGLE: 38°			NON DIMMABLE		



PAR

DIMMABLE SERIES



					
warm white cool white	38°	5w 7w 13w 15w	425lms 650lms 1150lms 1250lms	50w 60w 100w 120w	Dim

A+ SMART LED™

ACD™
DRIVER
for longer life &
superior heat
resistance.



PAR16

PAR16	SPECIFICATION	BASE	COVER COLOUR	COLOUR	CCT	CODE
5w	POWER: 5w = 50w = 425lms	SES (E14)	CLASSIC LENS	Warm White	2700K	SLP16 SES D5W
	VOLTS / Hz: 220 - 240V / 50-60Hz			Cool White	6500K	SLP16 SES D5C
	BEAM ANGLE: 38°			DIMMABLE		

PAR20	SPECIFICATION	BASE	COVER COLOUR	COLOUR	CCT	CODE
7w	POWER: 7w = 60w = 650lms	ES (E27)	CLASSIC LENS	Warm White	2700K	SLP20 ES D7W
	VOLTS / Hz: 220 - 240V / 50-60Hz			Cool White	6500K	SLP20 ES D7C
	BEAM ANGLE: 38°			DIMMABLE		



PAR20



PAR30

PAR30	SPECIFICATION	BASE	COVER COLOUR	COLOUR	CCT	CODE
13w	POWER: 13w = 100w = 1150lms	ES (E27)	CLASSIC LENS	Warm White	2700K	SLP30 ES D13W
	VOLTS / Hz: 220 - 240V / 50-60Hz			Cool White	6500K	SLP30 ES D13C
	BEAM ANGLE: 38°			DIMMABLE		

PAR38	SPECIFICATION	BASE	COVER COLOUR	COLOUR	CCT	CODE
15w	POWER: 15w = 120w = 1250lms	ES (E27)	CLASSIC LENS	Warm White	2700K	SLP38 ES D15W
	VOLTS / Hz: 220 - 240V / 50-60Hz			Cool White	6500K	SLP38 ES D15C
	BEAM ANGLE: 38°			DIMMABLE		



PAR38

PAR DIMMABLE SERIES

PAR

OUTDOOR SERIES

IP65 WATERPROOF



					
day white	38°	9w 13w	680lms 1000lms	75w 100w	No Dim


A+ SMART LED™

ACD™
DRIVER
for longer life &
superior heat
resistance.



IP65 WATERPROOF SERIES


S15 STRIP SERIES

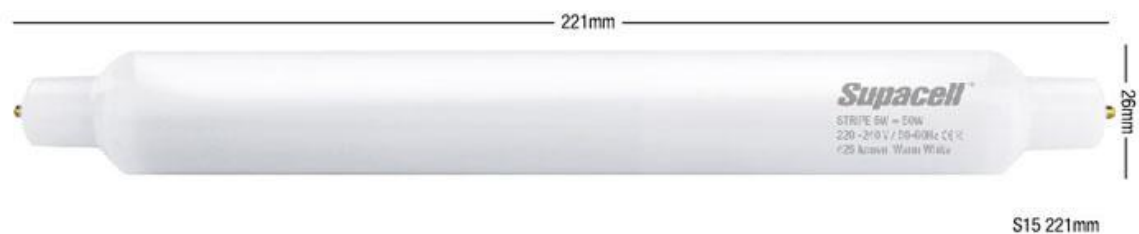


warm white	120°	5w	425lms	50w	No Dim

A+ SMART LED™

ACD™
DRIVER
for longer life &
superior heat
resistance.

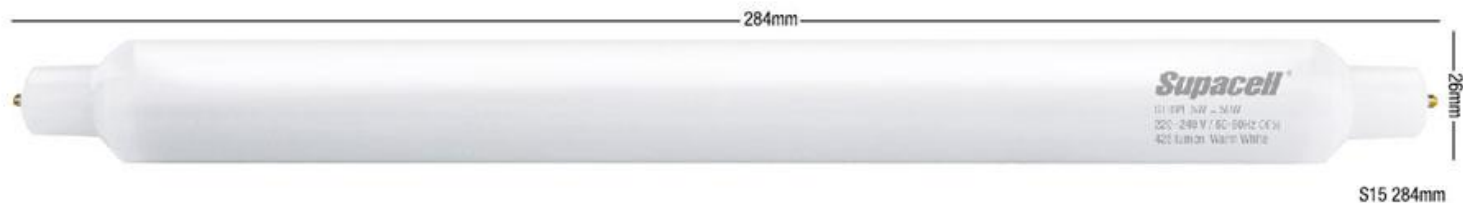

5W	SPECIFICATION	BASE	COVER COLOUR	COLOUR	CCT	CODE
	POWER: 5w = 50w = 425lms	S15	OPAL / PEARL	Warm White	2700K	SLTS 221 5
	VOLTS / Hz: 220 - 240V / 50-60Hz					SLTS 284 5
	BEAM ANGLE: 120°					
						

NON DIMMABLE



S15 STRIP SERIES

TUBES SERIES

T5, T8



warm white cool white	360°	9w 14w 18w 24w 35w	900lm 1400lm 1800lms 2400lms 3500lms	18w 28w 36w 48w 70w	No Dim

*Fluorescent Tube Equivalent

POWER FACTOR
0.9PF

FREE DUMMY
REPLACEMENT
STARTER





TRIPLE COATED SHATTER PROOF™
TRICOAT
TECHNOLOGY

SUPER EFFICIENT
100
LUMEN
per WATT

16mm	604mm	2 Feet
29.5mm	614mm	
16mm	900mm	3 Feet
29.5mm	914mm	
16mm	1212mm	4 Feet
29.5mm	1214mm	
16mm	1512mm	5 Feet
29.5mm	1514mm	
16mm	1814mm	6 Feet
29.5mm	1814mm	

Tube Fitting Guide online

- Instant start up & flicker free
- Up to 50% saving compared to Regular Fluorescent Tubes
- Up to 3.5 x longer lasting compared to Regular Fluorescent Tubes
- Lasts up to 25 years & 30,000 hours
- 100 lumen/Watt

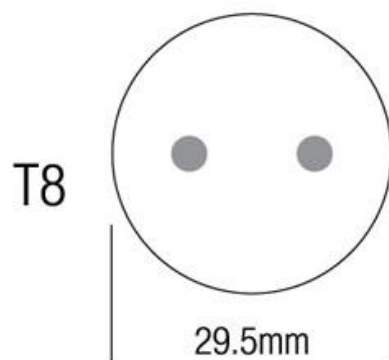

coming soon
T5 & T8 integrated fittings
with/without ON/OFF switch

2 Feet	SPECIFICATION	BASE	COVER COLOUR	COLOUR	CCT	CODE
9w	POWER: 9w = 18w* = 900lms	G13	OPAL / PEARL	Day White	4000K	SLT8 2 9D
	VOLTS / Hz: 100-240V / 50-60Hz	G13		Cool White	6500K	SLT8 2 9C
	BEAM ANGLE: 360°			Warm White	2700K	SLT5 2 9W
				Cool White	6500K	SLT5 2 9C
NON DIMMABLE						
3 Feet	SPECIFICATION	BASE	COVER COLOUR	COLOUR	CCT	CODE
14w	POWER: 14w = 28w* = 1400lms	G13	OPAL / PEARL	Day White	4000K	SLT8 3 14D
	VOLTS / Hz: 100-240V / 50-60Hz	G13		Cool White	6500K	SLT8 3 14C
	BEAM ANGLE: 360°			Warm White	2700K	SLT5 3 14W
				Cool White	6500K	SLT5 3 14C
NON DIMMABLE						
4 Feet	SPECIFICATION	BASE	COVER COLOUR	COLOUR	CCT	CODE
18w	POWER: 18w = 36w* = 1800lms	G13	OPAL / PEARL	Day White	4000K	SLT8 4 18D
	VOLTS / Hz: 100-240V / 50-60Hz	G13		Cool White	6500K	SLT8 4 18C
	BEAM ANGLE: 360°			Warm White	2700K	SLT5 4 18W
				Cool White	6500K	SLT5 4 18C
NON DIMMABLE						
5 Feet	SPECIFICATION	BASE	COVER COLOUR	COLOUR	CCT	CODE
24w	POWER: 24w = 48w* = 2500lms	G13	OPAL / PEARL	Day White	4000K	SLT8 5 24D
	VOLTS / Hz: 100-240V / 50-60Hz	G13		Cool White	6500K	SLT8 5 24C
	BEAM ANGLE: 360°			Warm White	2700K	SLT5 5 24W
				Cool White	6500K	SLT5 5 24C
NON DIMMABLE						
6 Feet	SPECIFICATION	BASE	COVER COLOUR	COLOUR	CCT	CODE
35w	POWER: 35w = 70w* = 3500lms	G13	OPAL / PEARL	Day White	4000K	SLT8 6 35D
	VOLTS / Hz: 100-240V / 50-60Hz	G13		Cool White	6500K	SLT8 6 35C
	BEAM ANGLE: 360°			Warm White	2700K	SLT5 6 35W
				Cool White	6500K	SLT5 6 35C
NON DIMMABLE						

T5/T8 TUBES SERIES

A+ SMART LED™

**ACD™
DRIVER**
for longer life &
superior heat
resistance.

100 lumen per watt*
*Fluorescent Tube Equivalent



U LAMP SERIES

CFL ENERGY SAVING STYLE



A+ SMART LED™

**ACD™
DRIVER**
for longer life &
superior heat
resistance.



warm white
day white
cool white



360°



5w
9w
12w



425lm
800lms
1050lms



40w
60w
75w



14w
18w
24w




No Dim

*Equivalent wattage of CFL watts

- 360° with instant light up & available in both E27 & B22 CAP
- Up to 50% cost saving compared to regular U Lamp/CFL Energy Lamp
- Up to 90% saving compared to Regular Lamps
- Lasts up to 25 years & 30,000 hours
- Lasts up to 3.5 x longer than standard U Lamp/CFL * Energy Lamp

CFL STYLE U LAMP SERIES

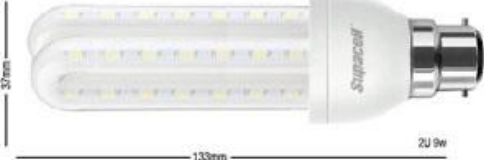	5w	SPECIFICATION POWER: 5w = 40w = 14w* = 425lms VOLTS / Hz: 100 - 250V / 50-60Hz BEAM ANGLE: 360° *Equivalent wattage of CFL watts		BASE ES (E27) BC (B22)	COLOUR Warm White Day White Cool White	CCT 2700K 4000K 5800K-6500K	CODE SLUCL PES 5W SLUCL PBC 5W SLUCL PES 5D SLUCL PBC 5D SLUCL PES 5C SLUCL PBC 5C	NON DIMMABLE
	9w	SPECIFICATION POWER: 9w = 60w = 18w* = 800lms VOLTS / Hz: 100 - 250V / 50-60Hz BEAM ANGLE: 360° *Equivalent wattage of CFL watts		BASE ES (E27) BC (B22)	COLOUR Warm White Day White Cool White	CCT 2700K 4000K 5800K-6500K	CODE SLUCL PES 9W SLUCL PBC 9W SLUCL PES 9D SLUCL PBC 9D SLUCL PES 9C SLUCL PBC 9C	NON DIMMABLE
	12w	SPECIFICATION POWER: 12w = 75w = 24w* = 1050lms VOLTS / Hz: 100 - 250V / 50-60Hz BEAM ANGLE: 360° *Equivalent wattage of CFL watts		BASE ES (E27) BC (B22)	COLOUR Warm White Day White Cool White	CCT 2700K 4000K 5800K-6500K	CODE SLUCL PES 12W SLUCL PBC 12W SLUCL PES 12D SLUCL PBC 12D SLUCL PES 12C SLUCL PBC 12C	NON DIMMABLE

*Compact Fluorescent Lamp

PLC G24 SERIES



warm white day white cool white	360°	5w 9w 12w	425lms 800lms 1050lms	40w 60w 75w	14w 18w 24w	No Dim

*Equivalent wattage of CFL watts



- 360° with instant light up & available in Universal G24Q-4 PIN CAP or all types G24D-2 PIN CAP (see chart opposite)
- Up to 50% saving compared to Regular PLC Fluorescent Tube/Lamp
- Up to 90% saving compared to Regular Lamps
- Lasts up to 3.5 x longer than standard U Lamp/CFL* Energy Lamp
- Lasts up to 25 years & 30,000 hours

*Compact Fluorescent Lamp

5w

SPECIFICATION	BASE	COLOUR	CCT	CODE
POWER: 5w = 40w = 14w* = 425lms	G24D1,2,3,4	Warm White	2700K	SLPLC PG24D 5W
VOLTS / Hz: 100 - 250V / 50-60Hz	G24Q*-4pin			SLPLC PG24Q 5W
BEAM ANGLE: 360°	G24D1,2,3,4	Day White	4000K	SLPLC PG24D 5D
	G24Q*-4pin			SLPLC PG24Q 5D
	G24D1,2,3,4	Cool White	5800K-6500K	SLPLC PG24D 5C
	G24Q*-4pin			SLPLC PG24Q 5C

*Equivalent wattage of CFL watts



NON DIMMABLE



PLC G24 5w

9w

SPECIFICATION	BASE	COLOUR	CCT	CODE
POWER: 9w = 60w = 18w* = 800lms	G24D1,2,3,4	Warm White	2700K	SLPLC PG24D 9W
VOLTS / Hz: 100 - 250V / 50-60Hz	G24Q*-4pin			SLPLC PG24Q 9W
BEAM ANGLE: 360°	G24D1,2,3,4	Day White	4000K	SLPLC PG24D 9D
	G24Q*-4pin			SLPLC PG24Q 9D
	G24D1,2,3,4	Cool White	5800K-6500K	SLPLC PG24D 9C
	G24Q*-4pin			SLPLC PG24Q 9C

*Equivalent wattage of CFL watts



NON DIMMABLE



PLC G24 9w


12w

SPECIFICATION	BASE	COLOUR	CCT	CODE
POWER: 12w = 75w = 24w* = 1050lms	G24D1,2,3,4	Warm White	2700K	SLPLC PG24D 12W
VOLTS / Hz: 100 - 250V / 50-60Hz	G24Q*-4pin			SLPLC PG24Q 12W
BEAM ANGLE: 360°	G24D1,2,3,4	Day White	4000K	SLPLC PG24D 12D
	G24Q*-4pin			SLPLC PG24Q 12D
	G24D1,2,3,4	Cool White	5800K-6500K	SLPLC PG24D 12C
	G24Q*-4pin			SLPLC PG24Q 12C

*Equivalent wattage of CFL watts




NON DIMMABLE

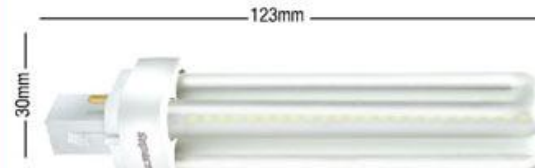


PLC G24 12w

**Available in G24D-1, G24D-2, G24D-3, G24D-4


G24D-1



G24D-2



G24D-3




G24D-4



* UNIVERSAL CAP G24Q

G24Q



A+ SMART LED™

ACD™
DRIVER
for longer life &
superior heat
resistance.

CRI 83+

ERP

GLOBAL 100-250V
STANDARD LED
A+ SMART

3
YEARS
WARRANTY

TUV
SUD

RoHS


CE

PLC G24 SERIES

R7 FLOOD SERIES

SUPER EFFICIENT
100
LUMEN
per WATT

360°

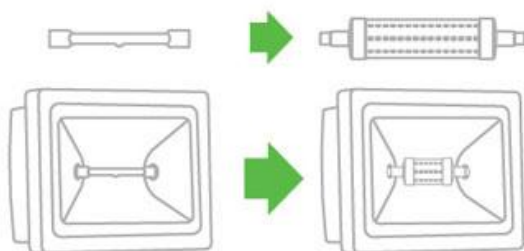

Direct replacement for halogen security lamp

day white	360°	5w 10w 15w	500lm 1000lms 1500lms	50w 75w 100w	No PIR



100 lumen per watt*




A+ SMART LED™

ACD™
DRIVER
for longer life &
superior heat
resistance.

5w	SPECIFICATION	BASE	COLOUR	CCT	CODE
	POWER: 5w = 50w = 500lms	Linear	Day White	4000K	SL R7 5
	VOLTS / Hz: 100 - 250V / 50-60Hz	NON DIMMABLE			
	BEAM ANGLE: 360°				

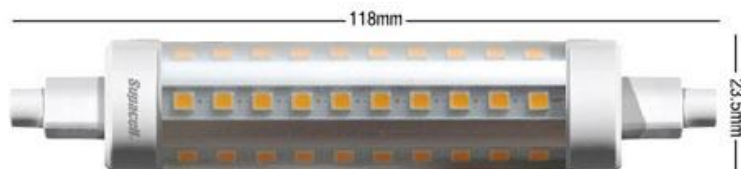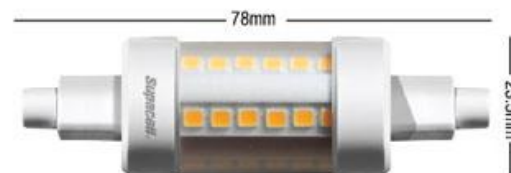

10w	SPECIFICATION	BASE	COLOUR	CCT	CODE
	POWER: 10w = 75w = 1000lms	Linear	Day White	4000K	SL R7 10
	VOLTS / Hz: 100 - 250V / 50-60Hz	NON DIMMABLE			
	BEAM ANGLE: 360°				

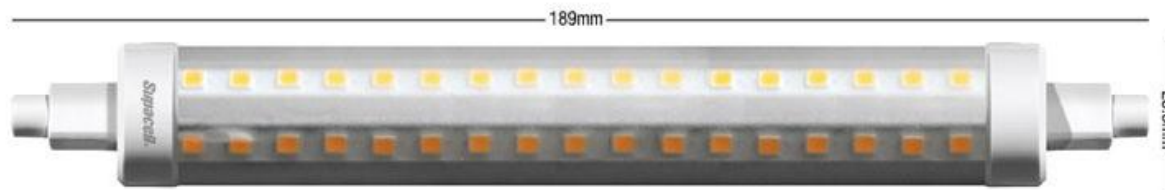

15w	SPECIFICATION	BASE	COLOUR	CCT	CODE
	POWER: 15w = 100w = 1500lms	Linear	Day White	4000K	SL R7 15
	VOLTS / Hz: 100 - 250V / 50-60Hz	NON DIMMABLE			
	BEAM ANGLE: 360°				

→ Now also available in

COLOUR	CCT
Warm White	2700K
Cool White	6500K

R7 FLOOD SERIES

R7 linear Halogen lamp replacement

100 lumen per watt*

SLIM FLOOD

SERIES



					
day white	120°	10w 20w 30w 50w	700lms 1400lms 2100lms 3500lms	50w 100w 150w 250w	PIR NON PIR

A+ SMART LED™


**ACD™
DRIVER**
for longer life &
superior heat
resistance.




- Up to 90% energy savings
- Maintenance free
- Pre-wired
- 100% instant light output
- 0.9 Power-factor for increased efficiency & quality
- High strength tempered safety glass enabling high transmittance and impact resistance
- Multi-angle and adjustable shelf, attractive appearance and convenient installation
- Using SMD/COB LED chip for ultra bright light
- Precision segregated ACD driver for accurate and consistent transmission




10w	SPECIFICATION	BASE	COVER COLOUR	COLOUR	CCT	CODE
	POWER: 10w = 50w = 700-800lms VOLTS / Hz: 100 - 250V / 50-60Hz BEAM ANGLE: 120°	FITTING	Metallic Grey, Black, White	Day White	4000K	SLF 10S SLF PIR10S
			NON PIR Size: 130x90x126mm			
			MICROWAVE PIR			




20w	SPECIFICATION	BASE	COVER COLOUR	COLOUR	CCT	CODE
	POWER: 20w = 100w = 1400-1600lms VOLTS / Hz: 100 - 250V / 50-60Hz BEAM ANGLE: 120°	FITTING	Metallic Grey, Black, White	Day White	4000K	SLF 20S SLF PIR20S
			NON PIR Size: 180x130x169mm			
			MICROWAVE PIR			



30w	SPECIFICATION	BASE	COVER COLOUR	COLOUR	CCT	CODE
	POWER: 30w = 150w = 2100-2400lms VOLTS / Hz: 100 - 250V / 50-60Hz BEAM ANGLE: 120°	FITTING	Metallic Grey, Black, White	Day White	4000K	SLF30S SLFPIR30S
			NON PIR Size: 180x130x169mm			
			MICROWAVE PIR			



50w	SPECIFICATION	BASE	COVER COLOUR	COLOUR	CCT	CODE
	POWER: 50w = 250w = 3500-4000lms VOLTS / Hz: 100 - 250V / 50-60Hz BEAM ANGLE: 120°	FITTING	Metallic Grey, Black, White	Day White	4000K	SLF 50S SLFPIR50S
			NON PIR Size: 290x208x270mm			
			MICROWAVE PIR			



→ Now also available in

COLOUR	CCT
Warm White	3000k
Cool White	6500k



SLIM FLOOD SERIES

FLOOD SERIES

LIGHT WEIGHT



day white



120°



10w
20w
30w
50w



700lms
1400lms
2100lms
3500lms



50w
100w
150w
250w



PIR
NON PIR

A+ SMART LED™

**ACD™
DRIVER**
for longer life &
superior heat
resistance.



➔ Now also available in

COLOUR	CCT
Warm White	3000k
Cool White	6500k



- High strength tempered safety glass enabling high transmittance and impact resistance
- Multi-angle and adjustable shelf, attractive appearance and convenient installation
- Precision segregated ACD driver for accurate and consistent transmission



- Using SMD/COB LED chip for ultra bright light
- Up to 90% energy savings
- 100% instant light output
- Pre-wired
- Maintenance free
- 0.9 Power-factor for increased efficiency & quality

10w

SPECIFICATION	BASE	COVER COLOUR	COLOUR	CCT	CODE
POWER: 10w = 50w = 700lms	FITTING	Metalic Grey, Black	Day White	4000K	SLF 10
VOLTS / Hz: 100 - 250V / 50-60Hz					SLF PIR 10
BEAM ANGLE: 120°					
					NON PIR Size: 115x95x70mm
					WITH PIR Size: 150x135x95mm



20w

SPECIFICATION	BASE	COVER COLOUR	COLOUR	CCT	CODE
POWER: 20w = 100w = 1400lms	FITTING	Metalic Grey, Black	Day White	4000K	SLF 20
VOLTS / Hz: 100 - 250V / 50-60Hz					SLF PIR 20
BEAM ANGLE: 120°					
					NON PIR Size: 180x155x88mm
					WITH PIR Size: 185x180x95mm





30w

SPECIFICATION	BASE	COVER COLOUR	COLOUR	CCT	CODE
POWER: 30w = 150w = 2100lms	FITTING	Metalic Grey, Black	Day White	4000K	SLF 30
VOLTS / Hz: 100 - 250V / 50-60Hz					SLF PIR 30
BEAM ANGLE: 120°					
					NON PIR Size: 225x195x120mm
					WITH PIR Size: 225x120x125mm

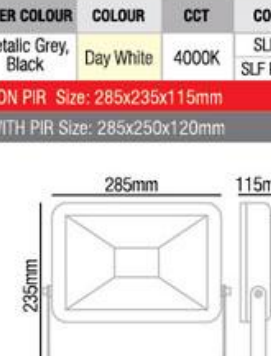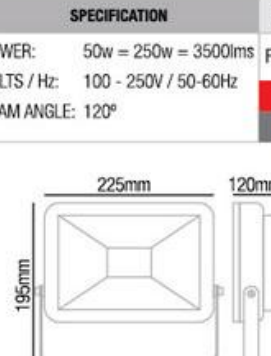

50w

SPECIFICATION	BASE	COVER COLOUR	COLOUR	CCT	CODE
POWER: 50w = 250w = 3500lms	FITTING	Metalic Grey, Black	Day White	4000K	SLF 50
VOLTS / Hz: 100 - 250V / 50-60Hz					SLF PIR 50
BEAM ANGLE: 120°					
					NON PIR Size: 285x235x115mm
					WITH PIR Size: 285x250x120mm



FLOOD SERIES



COMMERCIAL FLOOD SERIES

- High strength tempered safety glass enabling high transmittance and impact resistance
- Multi-angle and adjustable shelf, attractive appearance and convenient installation
- Precision segregated ACD driver for accurate and consistent transmission
- Using SMD/COB LED chip for ultra bright light
- 0.9 Power-factor for increased efficiency & quality



- Up to 90% energy savings
- 100% instant light output
- Maintenance free
- Pre-wired



day white



120°



80w
100w
150w



6000lms
8000lms
12000lms



PIR
NON PIR


A+ SMART LED™






80w

SPECIFICATION	BASE	COVER COLOUR	COLOUR	CCT	CODE
POWER: 80w = 6000lms	FITTING	Metallic Grey, Black	Day White	4000K	SLF 80
VOLTS / Hz: 100 - 250V / 50-60Hz					SLF PIR 80
BEAM ANGLE: 120°					
			NON PIR Size: 388x90x282mm		
			WITH PIR		




100w

SPECIFICATION	BASE	COVER COLOUR	COLOUR	CCT	CODE
POWER: 100w = 8000lms	FITTING	Metallic Grey, Black	Day White	4000K	SLF 100
VOLTS / Hz: 100 - 250V / 50-60Hz					SLF PIR 100
BEAM ANGLE: 120°					
			NON PIR Size: 388x90x282mm		
			WITH PIR		



150w

SPECIFICATION	BASE	COVER COLOUR	COLOUR	CCT	CODE
POWER: 150w = 12000lms	FITTING	Metallic Grey, Black	Day White	4000K	SLF 150
VOLTS / Hz: 100 - 250V / 50-60Hz					SLF PIR 150
BEAM ANGLE: 120°					
			NON PIR Size: 426x156x327mm		
			WITH PIR		



→ Now also available in

COLOUR	CCT
Warm White	3000k
Cool White	6500k



COMMERCIAL FLOOD

PROFESSIONAL

AR111 PRO+ (G53/GU10), PAR16 (GU10/MR16) SERIES



12w	SPECIFICATION	BASE	COLOUR	CCT	CODE
	POWER: 12w = 75w = 800lms	G53	Warm White	2700K	SL AR111 PRO 12W
	VOLTS / Hz: 12V / 50-60Hz		Cool White	6500K	SL AR111 PRO 12C
	BEAM ANGLE: 16°/ 24°/ 38°		NON DIMMABLE		
			DIMMABLE		

12w	SPECIFICATION	BASE	COLOUR	CCT	CODE
	POWER: 12w = 75w = 800lms	GU10	Warm White	2700K	SL AR111 PRO GU12W
	VOLTS / Hz: Non Dim 100-240V		Cool White	6500K	SL AR111 PRO GU12C
	Dim 220-240V		NON DIMMABLE		
	BEAM ANGLE: 16°/ 24°/ 38°		DIMMABLE		

warm white cool white	38° 45°	5w 7w 12w	425lms 560lms 800lms	50w 70w 80w	No Dim

A+ SMART LED™

ACD™
DRIVER
for longer life &
superior heat
resistance.



PAR16
MR16
(COB CHIP)

	SPECIFICATION	BASE	COLOR	CCT	CODE	
5w	POWER: 5w = 50w = 425lms VOLTS / Hz: 100-250V / 50-60Hz 220-240V / 50-60Hz	GU10	Warm White	2700K	SL GU10 PRO 5W	NON DIMM
			Cool White	6500K	SL GU10 PRO 5C	
			Warm White	2700K	SL GU10 PRO 7W	
7w	POWER: 7w = 70w = 560lms VOLTS / Hz: 100-250V / 50-60Hz 220-240V / 50-60Hz		Cool White	6500K	SL GU10 PRO 7C	DIMM
			Warm White	2700K	SL GU10 DPRO 5W	
	BEAM ANGLE: 45°		Cool White	6500K	SL GU10 DPRO 5C	
			Warm White	2700K	SL GU10 DPRO 7W	
			Cool White	6500K	SL GU10 DPRO 7C	



PAR16
GU10
(COB CHIP)



PAR16
MR16
(COB CHIP)

	SPECIFICATION	BASE	COLOR	CCT	CODE	
5w	POWER: 5w = 50w = 425lms VOLTS / Hz: 12V / 50-60Hz	MR16	Warm White	2700K	SL MR16 PRO 5W	NON DIMM
			Cool White	6500K	SL MR16 PRO 5C	
			Warm White	2700K	SL MR16 PRO 7W	
7w	POWER: 7w = 70w = 560lms VOLTS / Hz: 12V / 50-60Hz		Cool White	6500K	SL MR16 PRO 7C	DIMM
	BEAM ANGLE: 45°		Warm White	2700K	SL MR16 DPRO 5W	
			Cool White	6500K	SL MR16 DPRO 5C	
			Warm White	2700K	SL MR16 DPRO 7W	
			Cool White	6500K	SL MR16 DPRO 7C	

Also available professional PAR20, PAR30 & PAR38

BASIC RANGE



C37	SPECIFICATION	BASE	COVER COLOUR	COLOUR	CCT	CODE	NON DIMMABLE
3w	POWER: 3w = 25w = 250lms 5w = 40w = 425lms	BC (B22)	OPAL / PEARL	Warm White	2700K	SLC P BC 3BS	
5w	VOLTS / Hz: 220 - 240V / 50-60Hz	SBC (B15)				SLC P BC 5BS	
	BEAM ANGLE: 200°	SES (E14)				SLC P SBC 3BS	
		ES (E27)				SLC P SES 3BS	

→ Now also available in

COLOUR	CCT
Day White	4000k
Cool White	6500k



G45	SPECIFICATION	BASE	COVER COLOUR	COLOUR	CCT	CODE	NON DIMMABLE
3w	POWER: 3w = 25w = 250lms 5w = 40w = 425lms	BC (B22)	OPAL / PEARL	Warm White	2700K	SLG P BC 3BS	
5w	VOLTS / Hz: 220 - 240V / 50-60Hz	SBC (B15)				SLG P BC 5BS	
	BEAM ANGLE: 200°	SES (E14)				SLG P SBC 3BS	
		ES (E27)				SLG P SES 3BS	

→ Now also available in

COLOUR	CCT
Day White	4000k
Cool White	6500k



A+ SMART LED™



- Lasts up to 25,000 hours
- 24 month warranty
- Aluminium & thermoplastic body

A60	5W	SPECIFICATION	BASE	COVER COLOUR	COLOUR	CCT	CODE
		POWER: 5w = 40w = 470lms	BC (B22)	OPAL / PEARL	Warm White	2700K	SLA P BC 5BS
		VOLTS / Hz: 100 - 250V / 50-60Hz	ES (E27)				SLA P ES 5BS
		BEAM ANGLE: 270°					
							NON DIMMABLE

A60	9W	SPECIFICATION	BASE	COVER COLOUR	COLOUR	CCT	CODE
		POWER: 9w = 60w = 850lms	BC (B22)	OPAL / PEARL	Warm White	2700K	SLA P BC 9BS
		VOLTS / Hz: 100 - 250V / 50-60Hz	ES (E27)				SLA P ES 9BS
		BEAM ANGLE: 270°					
							NON DIMMABLE



Now also available in

COLOUR	CCT
Day White	4000k
Cool White	6500k

SUPER EFFICIENT
90
LUMEN
WATT



SPOT	3W	SPECIFICATION	BASE	COLOUR	CCT	CODE
		POWER: 3w = 30w = 250lms	GU10	Warm White	2700K	SLGU10-3W BS
		VOLTS / Hz: 220-240V / 50-60Hz		Cool White	6500K	SLGU10-3C BS
		MR16 - 12V	MR16	Warm White	2700K	SLMR16-3W BS
		BEAM ANGLE: 38°		Cool White	6500K	SLMR16-3C BS
		WIDE BEAM ANGLE: 120°				NON DIMMABLE

SPOT	5W	SPECIFICATION	BASE	COLOUR	CCT	CODE
		POWER: 5w = 50w = 425lms	GU10	Warm White	2700K	SLGU10-5W BS
		VOLTS / Hz: 220-240V / 50-60Hz		Cool White	6500K	SLGU10-5C BS
		BEAM ANGLE: 38°		Warm White	2700K	SLMR16-5W BS
		WIDE BEAM ANGLE: 120°		Cool White	6500K	SLMR16-5C BS
						NON DIMMABLE

A+ SMART LED™




BASIC RANGE

Supacell[®] digital[™]

ALKALINE BATTERIES

Supacell Digital
Alkaline batteries use the latest
**ADVANCED ALKALINE
COMPOUND TECHNOLOGY**



9V2

9V1

D2

C2

AAA4



AA4




	4pk	8pk	12pk	24pk	4pk	12pk
CODE	BSUDAA4	BSUDAA8	BSUDAAS12H	BSUDAA24	BSUDAAA4	BSUDAAA12
PRODUCT	Digital AA	Digital AA	Digital AA	Digital AA	Digital AAA	Digital AAA
UNITS / SIZE	4pk Card	8pk Hanger	12pk Hanger	24pk Hanger	4pk Card	12pk Hanger
INNER CASE	12	12	12	6	12	12
MASTER CARTON	8 x 12	8 x 12	4 x 12	8 x 6	8 x 12	8 x 12
PALLET QTY.	120	48	65	36	143	66

	2pk	4pk	2pk	4pk	1pk	2pk
CODE	BSUDC2	BSUDC4	BSUDD2	BSUDD4	BSUD9V1	BSUD9V2
PRODUCT	Digital C	Digital C	Digital D	Digital D	Digital 9V	Digital 9V
UNITS / SIZE	2pk Card	4pk Hanger	2pk Card	4pk Hanger	1pk Card	2pk Card
INNER CASE	12	6	12	6	12	12
MASTER CARTON	8 x 12	8 x 6	8 x 12	8 x 6	8 x 12	8 x 12
PALLET QTY.	55	60	40	36	100	100

Supacell[®]
digital[™]
electronics

SUPERIOR QUALITY
Alkaline & Lithium Batteries



Easy Open

	2pk	2pk	2pk	2pk	2pk
CODE	BSCR2016-2	BSCR2025-2	BSCR2032-2	BSUDLR1-2	BSUDA23-2
PRODUCT	CR2016	CR2025	CR2032	LR1	A23
UNITS / SIZE	2pk Card	2pk Card	2pk Card	2pk Card	2pk Card
INNER CASE	12	12	12	12	12
MASTER CARTON	8 x 12	8 x 12	8 x 12	8 x 12	8 x 12
PALLET QTY.	-	-	-	-	-



LR1



2016



2025



2032



A23

Supacell[®] digital[™]

POS DISPLAY UNITS



CLIPSTRIP
12 packs



METAL
STAND
96 packs



	Floor Stand	Floor Stand	Counter POS	Metal Counter Unit	Pre-Loaded Clipstrips	Empty Clipstrips
CODE	POSFFS	BSUDF1	BSUDCB1	POSCH	BSUDCS12	PECS1
PRODUCT	Metal Floor Stand	Empty Stand	Empty Stand	Metal Stand	AA4/AAA4	Clipstrip
UNITS / SIZE	1	1	1	1	4pk	n/a
INNER CASE	n/a	n/a	n/a	n/a	2 x 12	n/a
MASTER CARTON	1	n/a	11	1	6 x 2 x 12	144
PALLET QTY.	4	40	5	20	40	n/a

Designed and Developed
in Great Britain.



www.supacell.eu.com
<https://shop.multibrands.eu.com>



◀ CLIPSTRIP



◀ POS BOX



◀ COUNTER UNIT



▶ TOWER UNITS

APPLIANCE LAMPS




- Suitable replacement bulb for most sewing machines, fridge, freezer and similar appliances
- Extremely low energy consumption
- Last upto 30,000 hours

2w	SPECIFICATION	BASE	COVER COLOUR	CCT	CCT	CODE
	POWER: 2w = 160lms	SES (E14)	OPAL / PEARL	Warm White	2700K	SLA P SES 2W
	VOLTS / Hz: 220 - 240V / 50-60Hz			Day White	4000K	SLA P SES 2D
				Cool White	6500K	SLA P SES 2C
NON DIMMABLE						



Supacell digital electronics LED LIGHTING CRI 83+

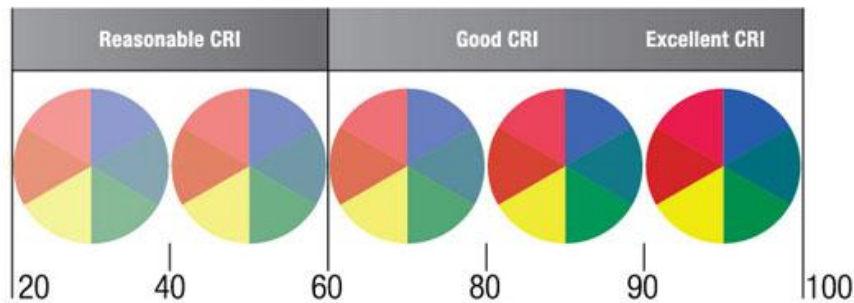


*CRI 83+ for best quality light clarity

We guarantee our SDCM (Standard Deviation of Colour Matching) within ErP guidelines to achieve almost perfect colour consistency.

*Varies from type to type, floods have lower CRI



We offer bespoke manufacturing for any type of lighting needs from street lights, fittings, to new or unique design requirements. We can cater to government contract requests, commercial contracts including schools, hotels, chainstores, airports. From stadium builds to shopping malls, off-shore, or industrial plants, no project is too big or too small for us. Please speak to our sales team.

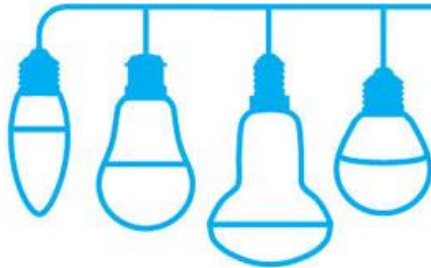



Head Office

MULTIBRANDS INTERNATIONAL LTD

Royds Hall, Royds Hall Lane, Bradford, England BD12 0EJ Tel: +44 (0) 1274 307310



China Office

MULTIBRANDS TRADING (SUZHOU) CO., LTD

Room 313, 58 Ruiyuan Building, Dongda Street, Suzhou China. Post Code 215002 Tel: +86 (0) 512 8228 9188



EU Office

MULTIBRANDS INTERNATIONAL SRL

Blvd. George Cosbuc, 42 – 44, Etaj 1, Sector 5, Bucuresti, Romania Tel: +40 (0) 31 4380853



India Office

MULTIBRANDS INTERNATIONAL PVT LTD

Office No. 314, Shopper's Orbit, Vishrantwadi, Pune, India Tel: +91 (0) 20 30261600

Online questionnaire available at: <http://bit.ly/NQm0cU> +44 (0)1274 307310 info@multibrands.eu.com



MultibrandsLTD



MultibrandsIntl



+MultibrandsEufmcg



Multibrands–International



Multibrands
Europe



Multibrands
Asia



www.supacell.eu.com

Designed and Developed
in Great Britain.

